

# 83

7 chambers, profile depth 81 mm

Decco 83 is a profile with extreme thermal parameters. The third gasket and wide glazing units with a warm frame provide parameters not guaranteed by other profiles.

**0,59**  $\frac{U_w}{W/m^2K}$

\* Reference window width 1230 mm, height 1480 mm with a glazing unit 4/12/4/12/4/12/4 kryp. o Ug=0.3 W/m<sup>2</sup>\*K with a SWISSPACER V Ultimate frame.

**decco**<sup>®</sup>  
E X T R U S I O N



DECCO 83

[www.decco.eu](http://www.decco.eu)

84 MD

AMERICAN SYSTEMS

SHUTTERS

62

71

82

83

EURO+

HST

SLIDE

65

AQUATHERM




- 7-chamber system with an installation width of 81 mm, with a third, central gasket
- The applicability of many types of glazing units with a thickness of 23 mm to 54.8 mm!
- Seals in gray or black
- A wide range of decorative foils
- Extended reinforcement chambers, increasing the rigidity of the windows and allowing the production of all properly designed structures
- The offer includes four core colors: white, anthracite, caramel, and dark brown
- Contains transition profiles for large sliding and balcony doors
- The optimum height of the assembly of the profiles which gives up to 5% more light compared to other systems in its class (two-wing windows with width of 1465 mm, height of 1435 mm)
- A and B class profiles in accordance with the standard PN-EN 12608 -1+A1
- In this system, it is possible to use glued glazing technology, which increases the stability of windows and allows for larger constructions
- The possibility of the use of thermal pads

## 2-glass package 4/16/4

24 mm Ug 1,0/Wm<sup>2</sup>K


SWISSPACER V spacer bar, argon

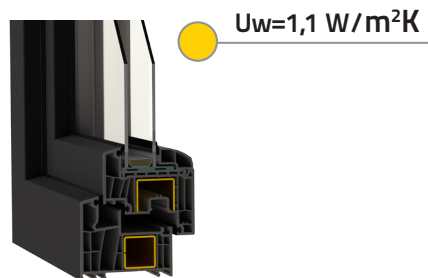

## 3-glass package 4/18/4/18/4

48 mm Ug 0,5/Wm<sup>2</sup>K


SWISSPACER V spacer bar, argon

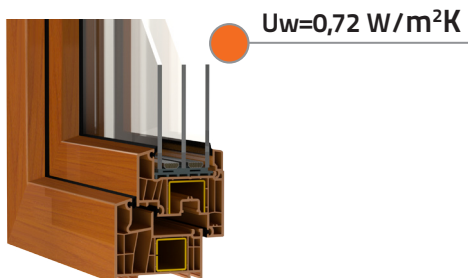

## 4-glass package 4/12/4/12/4/12/4

52 mm Ug 0,3/Wm<sup>2</sup>K

SWISSPACER ULTIMATE spacer bar, krypton

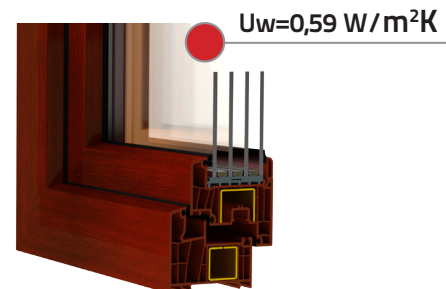

Profile available in a wide range of colour and wood-imitating veneers



Colours close to original due to print technology

and many others

Uw = **0,59** [W/m<sup>2</sup>K]\*

+ Reference window width 1230 mm, height 1480 mm with a glazing unit 4/12/4/12/4/12/4 kryp. Ug=0.3 W/m<sup>2</sup>\*K with a SWISSPACER V Ultimate frame.